

# DL 80

HAFNER

Pätkové upevnenie




## Properties

|                |                              |
|----------------|------------------------------|
| Priemer piestu | Ø63                          |
| ATEX zóna      | II 2 GD c T6 -20°C<Tamb<80°C |
| Materiál       | Oceľ                         |

# DL 80

HAFNER

## Pätkové upevnenie

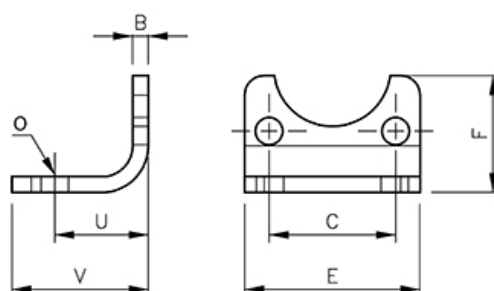

| Typ    | Priemer piestu | B | C    | E   | F  | O  | U  | V  |
|--------|----------------|---|------|-----|----|----|----|----|
| DL 32  | Ø 32           | 4 | 32,5 | 45  | 30 | 7  | 24 | 35 |
| DL 40  | Ø 40           | 4 | 38   | 52  | 30 | 10 | 28 | 36 |
| DL 50  | Ø 50           | 5 | 46,5 | 65  | 36 | 10 | 32 | 47 |
| DL 63  | Ø 63           | 5 | 56,5 | 75  | 35 | 10 | 32 | 45 |
| DL 80  | Ø 80           | 6 | 72   | 95  | 47 | 12 | 41 | 55 |
| DL 100 | Ø 100          | 6 | 89   | 115 | 53 | 14 | 41 | 57 |
| DL 125 | Ø 125          | 8 | 110  | 140 | 70 | 16 | 45 | 64 |